

1-6 GHZ BROADBAND LOW NOISE AMPLIFIER

Features:

- Hybrid MIC Thin Film Process
- Field Replacement SMA Connectors
- Reverse Bias Protection


Electrical Performance at 25 °C (Case Temp)

Parameter	Min.	Typ.	Max.	Units
Frequency	1		6	GHz
Gain at room temperature	15			dB
Gain Flatness over all frequency range at room temperature		± 0.6	± 1.9	dB
Power @ 1 dB Gain Compression Point	15			dBm
Noise Figure			1.6	dB
VSWR Input			2.0 : 1	
VSWR Output			2.0 : 1	
DC supply voltage (Vcc)		+12		V
Supplied Current			60	mA


1-6 GHZ BROADBAND LOW NOISE AMPLIFIER

Typical Test Data


Gain

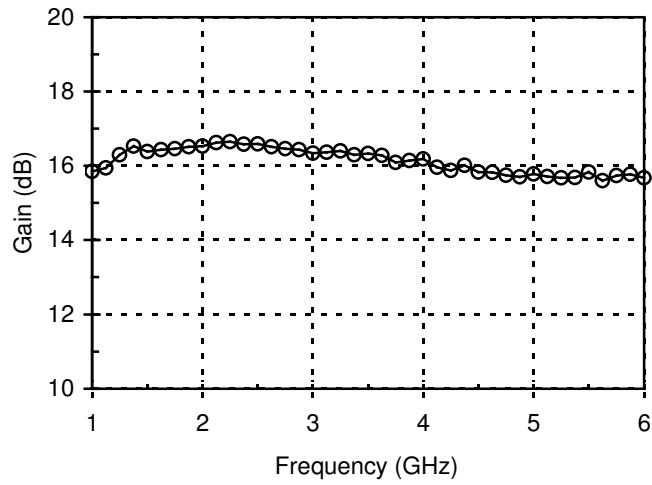

Noise Figure

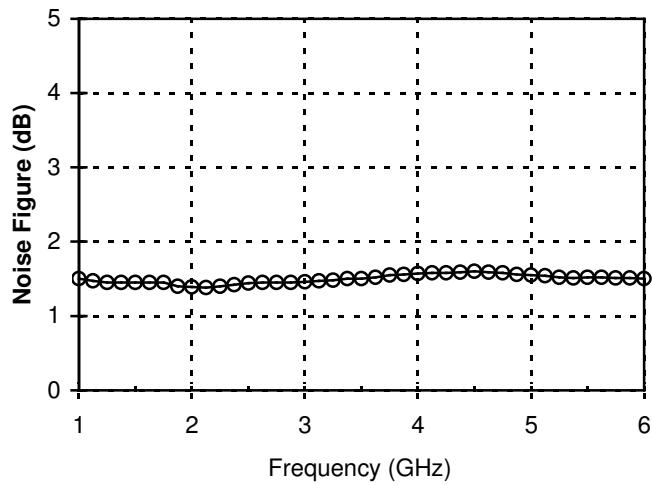


1-6 GHZ BROADBAND LOW NOISE AMPLIFIER

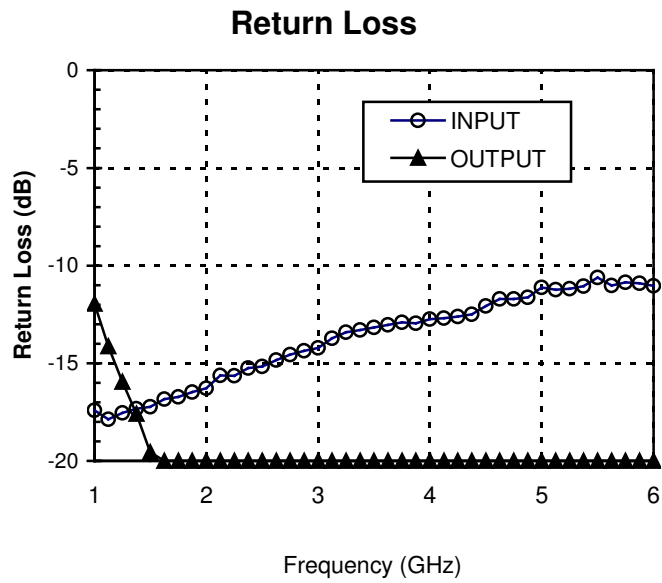

1-6 GHZ BROADBAND LOW NOISE AMPLIFIER

Outline Drawing

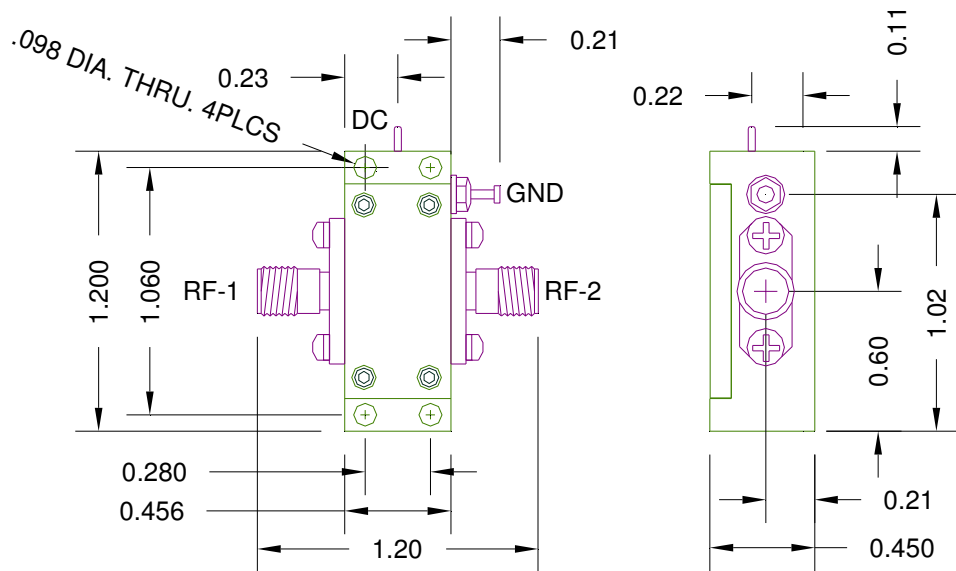

Unit: Inch

Tolerance: .xx±.015 .xxx±0.010 inch

Connector	Type	Pin#	Pin Name	In/Out	Description
RF-1	SMA-F	1	IN	I	RF Signal Input
RF-2	SMA-F	1	OUT	O	RF Signal Output
DC	EMI Filter	1	+12V	I	DC
GND	Ground Lug	1	GND	I	Ground