

NA00576

10-12.5 GHz 30 dB Gain Block Amplifier


Features:

- Thin Film Hybrid MIC Process
- Field Replaceable SMA Connectors
- Reverse Bias Protection

Electrical Performance

Parameter	Min.	Typ.	Max.	Unit	Note
Frequency	10		12.5	GHz	
Gain	30			dB	
Gain Flatness			1	dB(+/-)	
Power @ 1dB Gain Compression Point	18			dBm	
Noise Figure		3.0		dB	
VSWR Input			2		
VSWR Output			2		
Supplied Current			100	mA	
DC Supply Voltage	12		18	V	

Typical Test Data

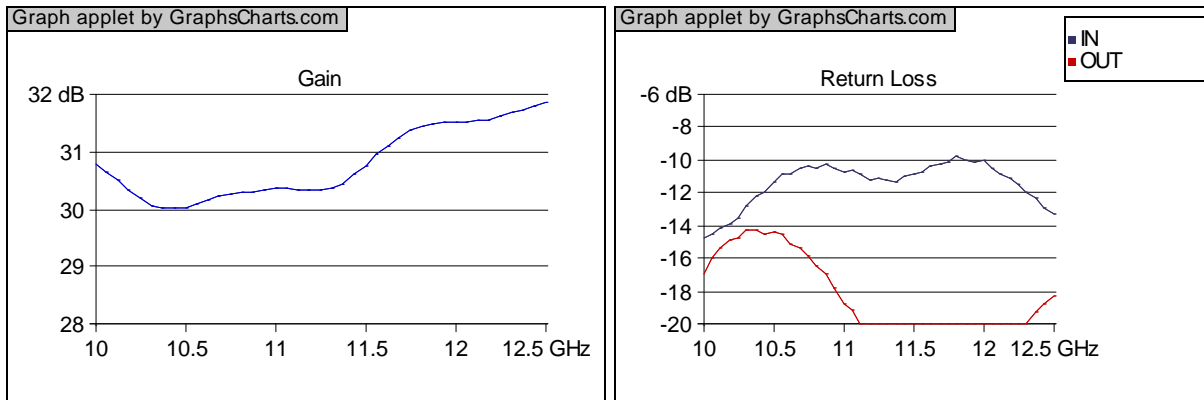


Updated: 9/5/2012




Nextec Microwave & RF, Inc. WWW.NEXTEC-RF.COM
 3010 Scott Blvd., Santa Clara, California 95054
 (408) 727-1189(Ph)/ (408) 727-5915(Fax)/ sales@nextec-rf.com

NA00576

10-12.5 GHz 30 dB Gain Block Amplifier

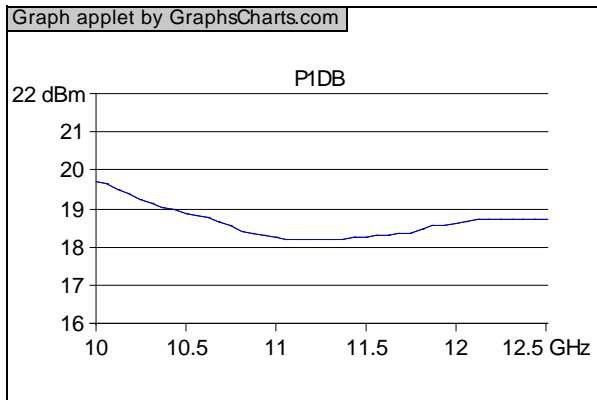

Outline Drawing

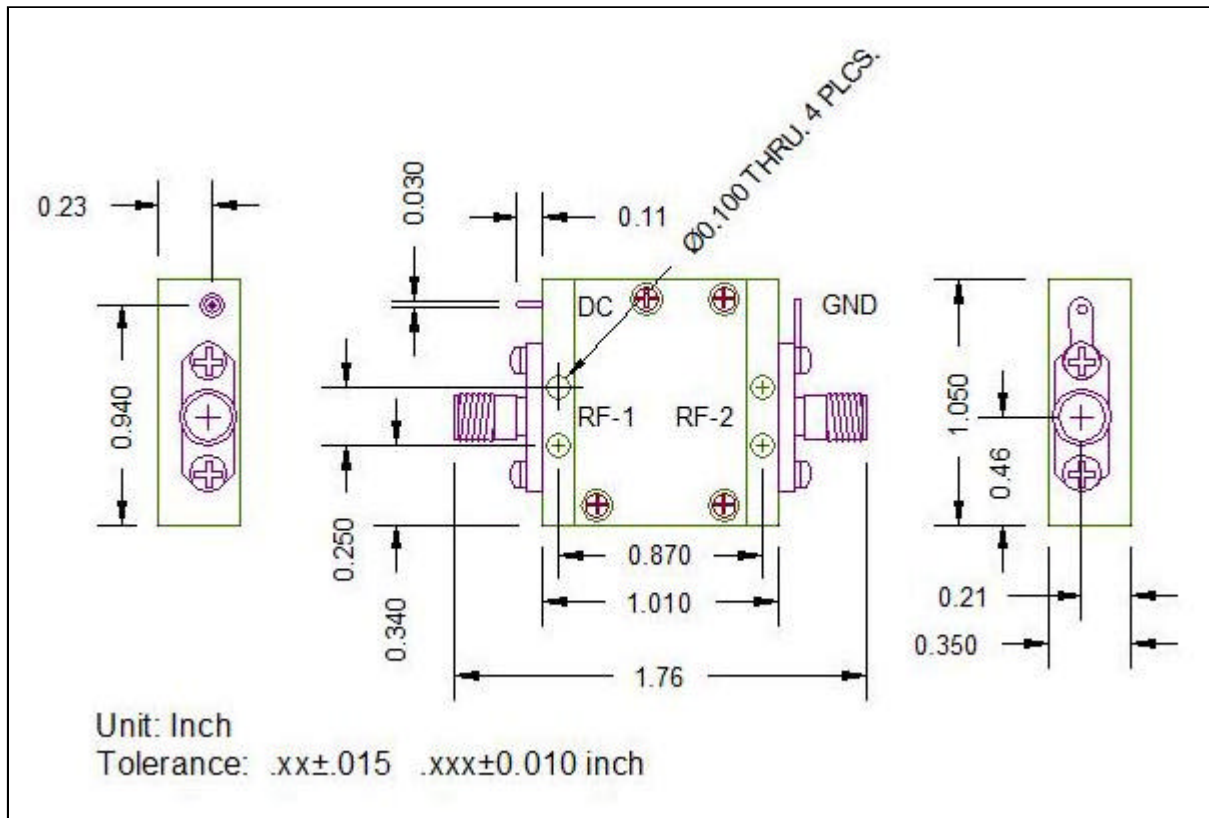

Connector	Type	Pin #	Pin Name	In/Out	Description
RF-1	SMA-F	1	IN	I	RF SIGNAL INPUT
RF-2	SMA-F	1	OUT	O	RF SIGNAL OUTPUT
DC	EMI Filter	1	+12 V	I	DC INPUT (+12 V TO +18 V)

Updated: 9/5/2012



Nextec Microwave & RF, Inc. WWW.NEXTEC-RF.COM
3010 Scott Blvd., Santa Clara, California 95054
(408) 727-1189(Ph)/ (408) 727-5915(Fax)/ sales@nextec-rf.com

NA00576

10-12.5 GHz 30 dB Gain Block Amplifier

GND GROUND LUG 1 GND O GROUND

Updated: 9/5/2012



Nextec Microwave & RF, Inc. WWW.NEXTEC-RF.COM
3010 Scott Blvd., Santa Clara, California 95054
(408) 727-1189(Ph)/ (408) 727-5915(Fax)/ sales@nextec-rf.com