

18-26.5 GHz Broadband Low Noise Amplifier


Features:

- Thin Film Hybrid MIC Process
- Field Replaceable RF Connectors
- Reverse Bias Protection

Electrical Performance


Parameter	Min.	Typ.	Max.	Unit	Note
Frequency	18.0		26.5	GHz	
Gain	18	20		dB	
Gain Flatness			2	dB(+/-)	
Noise Figure		3.0	3.5	dB	
Power @ 1dB Gain Compression Point	7	10		dBm	
VSWR Input		1.9	2.4		
VSWR Output		1.9	2.4		
DC Supply Voltage	9	12	15	V	
Supplied Current		50	75	mA	

Typical Test Data

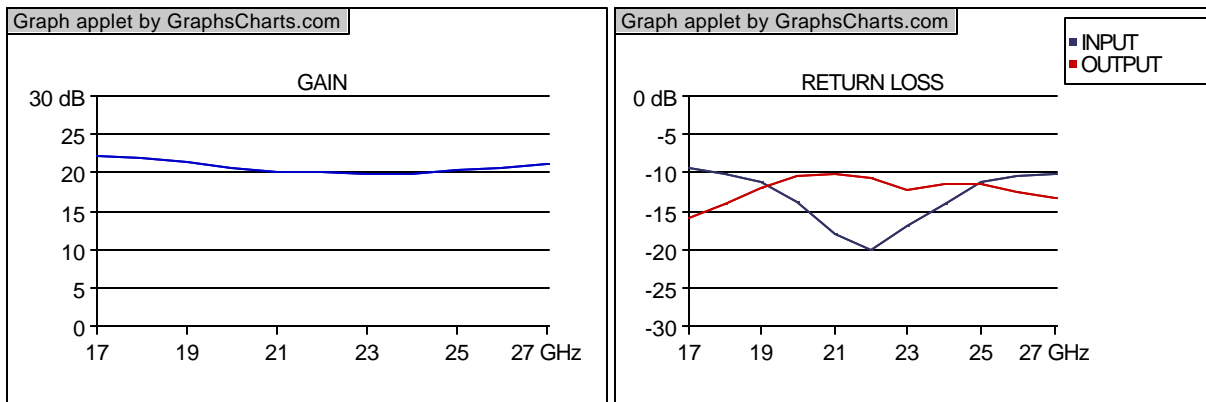


Updated: 10/25/2007

18-26.5 GHz Broadband Low Noise Amplifier

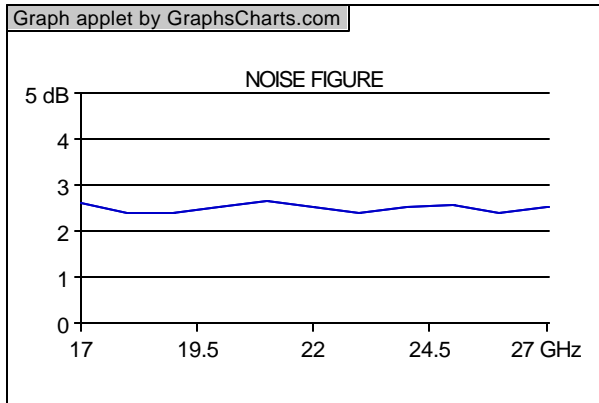

Outline Drawing

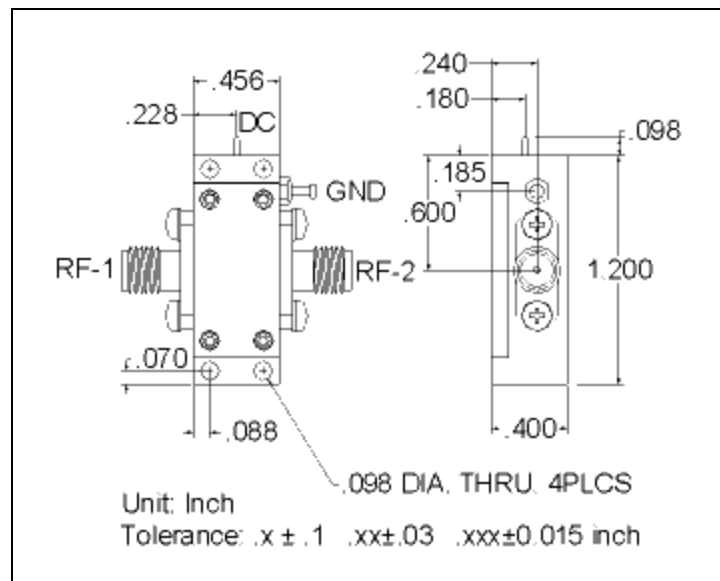

Connector	Type	Pin #	Pin Name	In/Out	Description
RF-1	SMA-F	1	IN	I	RF INPUT SIGNAL
RF-2	SMA-F	1	OUT	O	RF OUTPUT SIGNAL
DC	EMI Filter	1	+12 V	I	DC INPUT (+9 TO +15 V)
GND	GROUND LUG	1	GND	O	GROUND

Updated: 10/25/2007