

1750-1780 MHz Low Noise Amplifier

*General Description*


The NLC00340 is a Low Noise Amplifier for IMT-2000 System. It has very reliable characteristics in over all temperature range.

*Performance with -30 ~ +65 degC*

Parameter	Min.	Typ.	Max.	Units
Frequency	1750		1780	MHz
Gain at room temperature	37		39	dB
Gain Flatness over all frequency range at room temperature			±0.5	dB
Noise Figure over all temperature range			1.2	dB
1 dB Compression Point at room temperature		16		dBm
Output Third Order Intercept Point @ +10 dBm output power /tone, room temperature	35			dBm
Input VSWR			1.3 : 1	
Output VSWR			1.3 : 1	
DC supply voltage (Vcc)	+8		+15	V
Supplied Current			430	mA
Operating Temperature	-30		+65	degC

1750-1780 MHz Low Noise Amplifier

*Outline Drawing*

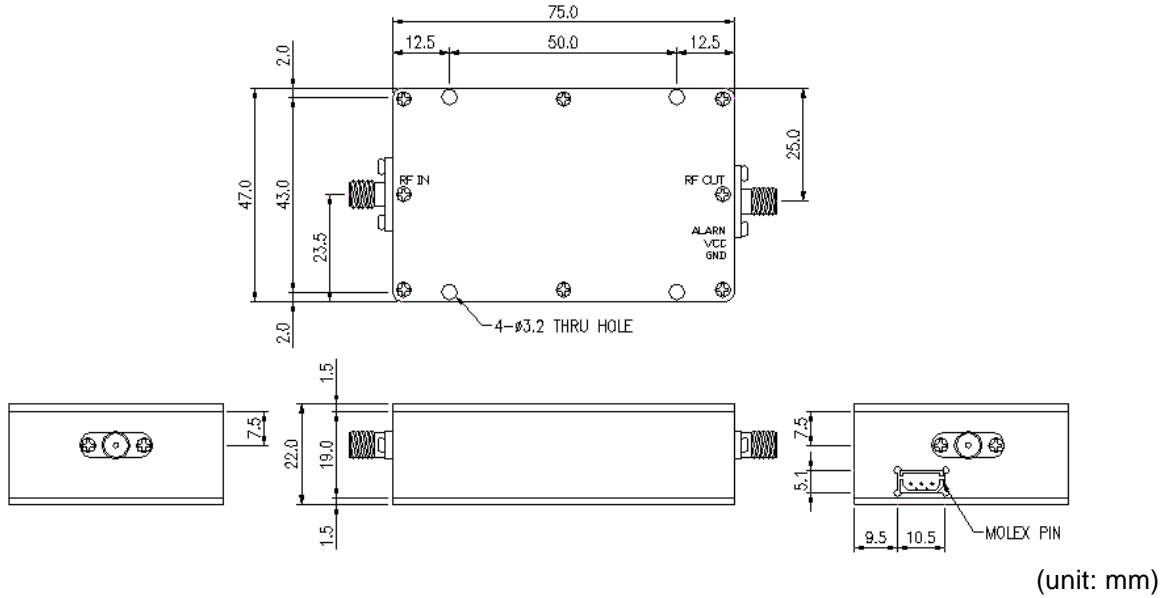

*Connector Description*

RFin	RF input signal (SMA-F)
RFout	RF output signal (SMA-F)
Vcc, GND, Fault Alarm	Molex 3-Pin Connector DC Supply Voltage (+8 - +15 V)