

2200-2700 MHz Low Noise Amplifier

General Description

The NLC00374 is a wide band Low Noise Amplifier. It has very reliable characteristics in over all temperature range. Its DC feed line includes EMI filter so that the unit is protected from a sudden impact from power supply.




Performance with -40 ~ +70 degC

Parameter	Min.	Typ.	Max.	Units
Frequency	2200		2700	MHz
Gain at room temperature	25		27	dB
Gain Flatness over all frequency range at room temperature			±2.2	dB
Noise Figure over all temperature range			1.5	dB
1 dB Compression Point at room temperature		23		dBm
Output Third Order Intercept Point @ +10 dBm output power /tone, room temperature	34			dBm
Input VSWR			1.5 : 1	
Output VSWR			1.5 : 1	
DC supply voltage (Vcc)		+15		V
Supplied Current			310	mA
Operating Temperature	-40		+70	degC

2200-2700 MHz Low Noise Amplifier

Outline Drawing

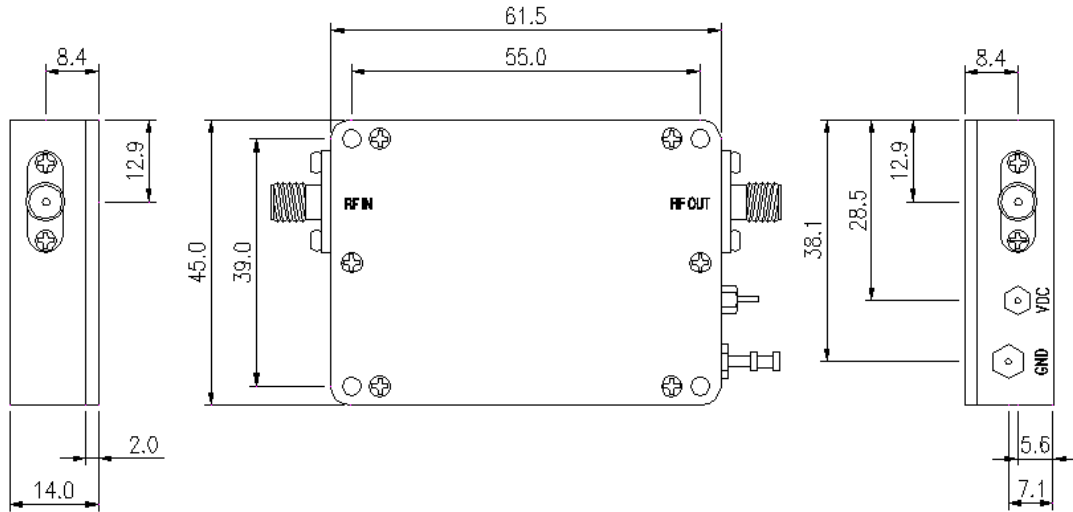

(unit: mm)

Connector Description

RFin	RF input signal (SMA-F)
RFout	RF output signal (SMA-F)
Vdc,	DC Supply Voltage (+15 V)